




SolidTack-Series

Fixing Parts with Special Adhesive



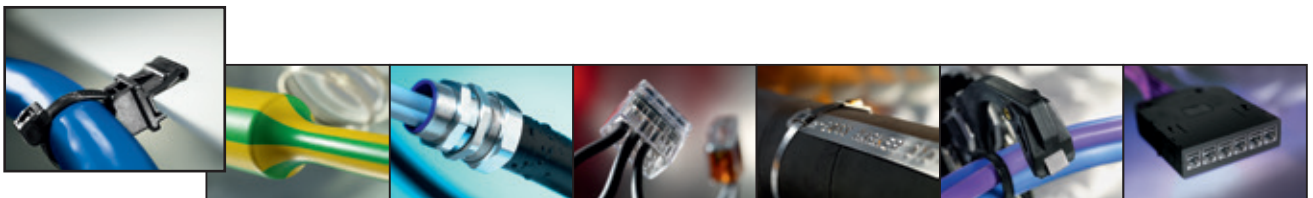

Cable Ties and Fixings

Cable Tie Mounts


Fixing Parts with Special Adhesive

• SolidTack-Series

SolidTack mounts offering an innovative fixing solution especially for low energy surfaces like PP, PE or if drilling a hole is not possible. Suitable for a wide range of in- and outdoor applications on varnished or plastic or metal surfaces in many areas e. g. electrical cabinet, railway, aerospace, automotive and agriculture machinery.

Features and Benefits


- MB mounts with homogeneous system of acrylic adhesive
- Very good initial adhesion, increases with time
- High cohesive strength combined with good weathering resistance
- Innovative fixing solution for low energy surfaces like PP, PE or painted / varnished surfaces
- protection foil with finger lift for easy peel off



Cable Tie Mounts MB3, MB4, MB5.



One Step to the Web!

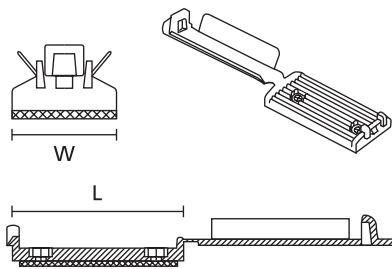

Flat Ribbon Cable Mounts - FKH-Series.



SolidTack products work on varnished and powder coated surfaces.

MATERIAL	Polyamide 6.6 high impact modified (PA66HIR)	Polyamide 6.6 (PA66)
Operating Temperature	-40 °C to +80 °C, (+105 °C, 500 h)	-40 °C to +85 °C, (+105 °C, 500 h)
Flammability	UL94 HB (excluding adhesive)	UL94 V2 (excluding adhesive)



Adhesive	Acrylate with base of acrylic foam
Adhesive Operating Temperature	-40 °C to +90 °C

TYPE	Width (W)	Length (L)	Height (H)	Hole Ø (FH)	For Cable Width max.	Material	Colour	Adhesive	Pack Cont.	E-number	Article-No.
MB3APT	19.0	19.0	3.8	3,1	-	PA66	Black (BK)	mod. Acrylate	100	00 000 00	151-00432
	19.0	19.0	3.8	3,1	-	PA66	Natural (NA)	mod. Acrylate	100	00 000 00	151-00514
MB4APT	28.0	28.0	4.7	4,0	-	PA66	Black (BK)	mod. Acrylate	100	00 000 00	151-00433
	28.0	28.0	4.7	4,0	-	PA66	Natural (NA)	mod. Acrylate	100	00 000 00	151-00587
MB5APT	38.0	38.0	6.3	4,7	-	PA66	Black (BK)	mod. Acrylate	100	00 000 00	151-00434
FKH50AVHB	25.0	56.5	-	3,1	50.0	PA66HIR	Black (BK)	mod. Acrylate	100	00 000 00	151-00312
FKH80AVHB	25.0	86.0	-	3,1	80.0	PA66HIR	Black (BK)	mod. Acrylate	100	00 000 00	151-00313

All dimensions in mm. Subject to technical changes.

Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available.

HellermannTyton

HellermannTyton Ltd
 Wharf Approach
 Aldridge, Walsall, West Midlands
 WS9 8BX
 Tel: +44 1922 458 151
 Fax: +44 1922 743 053
 E-Mail: info@HellermannTyton.co.uk
 www.HellermannTyton.co.uk